

## Lampiran 9: Datasheet L293D




L293D

## PUSH-PULL FOUR CHANNEL DRIVER WITH DIODES

## PRELIMINARY DATA

- 600mA. OUTPUT CURRENT CAPABILITY PER CHANNEL
- 1.2A PEAK OUTPUT CURRENT (NON REPETITIVE) PER CHANNEL
- ENABLE FACILITY
- OVERTEMPERATURE PROTECTION
- LOGICAL "0" INPUT VOLTAGE UP TO 1.5V (HIGH NOISE IMMUNITY)
- INTERNAL CLAMPS DIODES

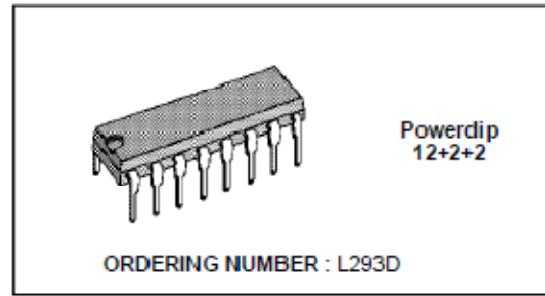

## DESCRIPTION


The L293D is a monolithic integrated high voltage, high current four channel driver designed to accept standard DTL or TTL logic levels and drive inductive loads (such as relays solenoids, DC and stepping motors) and switching power transistors.

To simplify use as two bridges is pair of channels is equipped with an enable input. A separate supply input is provided for the logic, allowing operation at a low voltage and internal clamp diodes are included.

This device is suitable for use in switching applications at frequencies up to 5 KHz.


The L293D is assembled in a 16 lead plastic package which has 4 center pins connected together and used for heatsinking.

## BLOCK DIAGRAM

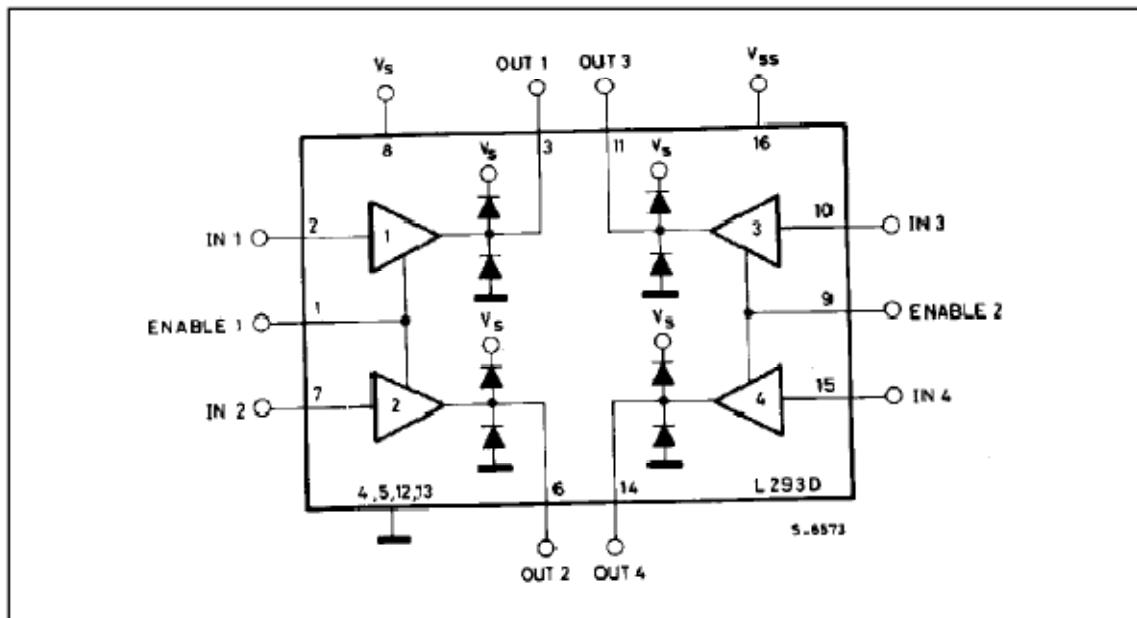

**L293D****ABSOLUTE MAXIMUM RATINGS**

Symbol	Parameter	Value	Unit
$V_s$	Supply Voltage	36	V
$V_{ss}$	Logic Supply voltage	36	V
$V_i$	Input voltage	7	V
$V_{en}$	Enable voltage	7	V
$I_o$	Peak output current (100μs non repetitive)	1.2	A
$P_{tot}$	Total power dissipation at $T_{ground-pins} = 80^\circ\text{C}$	5	W
$T_{stg}, T_j$	Storage and junction temperature	-40 to 150	°C

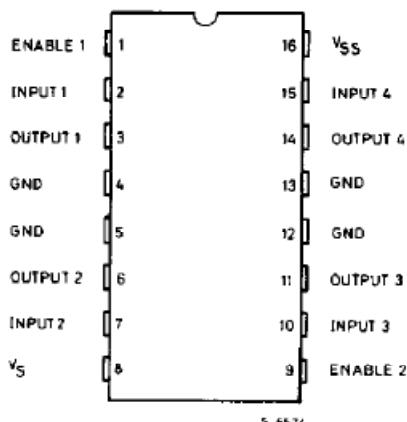**CONNECTION DIAGRAM****THERMAL DATA**

Symbol	Parameter	Value	Unit
$R_{th,j-case}$	Thermal resistance junction-case	max	14 °C/W
$R_{th j-case}$	Thermal resistance junction-ambient	max	80 °C/W

**ELECTRICAL CHARACTERISTICS** (For each channel,  $V_s = 24V$ ,  $V_{ss} = 5V$ ,  $T_{amb} = 25^\circ C$ , unless otherwise specified)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_s$	Supply voltage		$V_{ss}$		36	V
$V_{ss}$	Logic supply voltage (pin 16)		4.5		36	V
$I_s$	Total quiescent supply current (pin 8)	$V_i = L \quad I_o = 0 \quad V_{en} = H$		2	6	mA
		$V_i = H \quad I_o = 0 \quad V_{en} = H$		16	24	
		$V_{en} = L$			4	
$I_{ss}$	Total quiescent logic supply current (pin 16)	$V_i = L \quad I_o = 0 \quad V_{en} = H$		44	60	mA
		$V_i = H \quad I_o = 0 \quad V_{en} = H$		16	22	
		$V_{en} = L$		16	24	
$V_{IL}$	Input low voltage (pin 2, 7, 10, 15)		-0.3		1.5	V
$V_{IH}$	Input high voltage (pin 2, 7, 10, 15)	$V_{ss} \leq 7V$	2.3		$V_{ss}$	V
		$V_{ss} > 7V$	2.3		7	
$I_{IL}$	Low voltage input current (pin 2, 7, 10, 15)	$V_{IL} = 1.5V$			-10	µA
$I_{IH}$	High voltage input current (pin 2, 7, 10, 15)	$2.3 \leq V_{IH} \leq V_{ss} - 0.6V$		30	100	µA
$V_{enL}$	Enable low voltage (pin 1, 9)		-0.3		1.5	V
$V_{enH}$	Enable high voltage (pin 1, 9)	$V_{ss} \leq 7V$	2.3		$V_{ss}$	V
		$V_{ss} > 7V$	2.3		7	
$i_{enL}$	Low voltage enable current (pin 1, 9)	$V_{enL} = 1.5V$		-30	-100	µA
$i_{enH}$	High voltage enable current (pin 1, 9)	$2.3V \leq V_{enH} \leq V_{ss} - 0.6V$			$\pm 10$	µA
$V_{CEsatH}$	Source output saturation voltage (pin 3, 6, 11, 14)	$I_o = -0.6A$		1.4	1.8	V
$V_{CEsatL}$	Sink output saturation voltage (pins 3, 6, 11, 14)	$I_o = +0.6A$			1.2	1.8
$V_F$	Clamp diode forward voltage	$I_o = 600 \text{ mA}$		1.3		V
$t_r$	Rise time (*)	$0.1 \text{ to } 0.9 V_o$		250		ns
$t_f$	Fall time (*)	$0.9 \text{ to } 0.1 V_o$		250		ns
$t_{on}$	Turn-on delay (*)	$0.5 V_i \text{ to } 0.5 V_o$		750		ns
$t_{off}$	Turn-off delay (*)	$0.5 V_i \text{ to } 0.5 V_o$		200		ns


(\*) See fig.1

**L293D****TRUTH TABLE (One channel)**

INPUT	ENABLE (*)	OUTPUT
H	H	H
L	H	L
H	L	Z
L	L	Z

Z = High output impedance

(\*) Relative to the considered channel

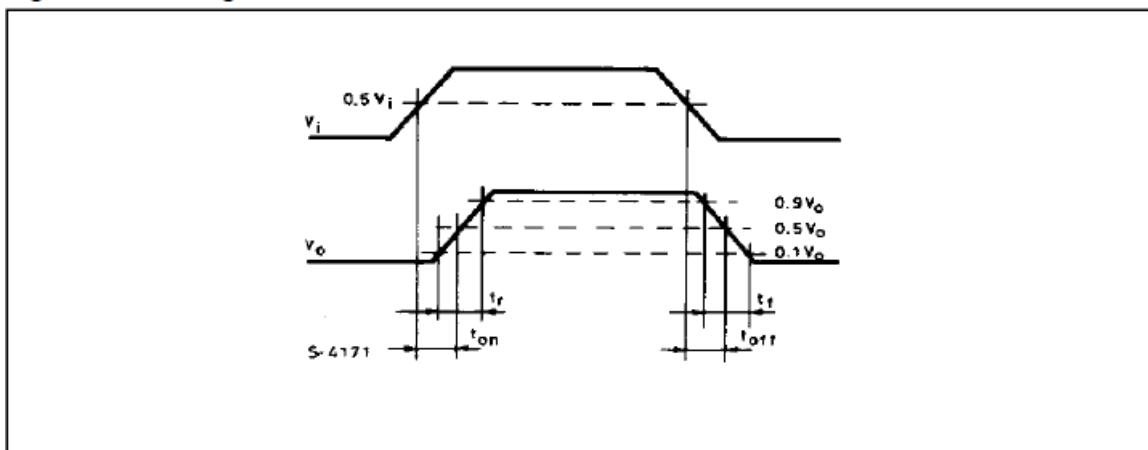**Figure 1. Switching Times**

**L293D****POWERDIP PACKAGE MECHANICAL DATA**

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
a1	0.51			0.020		
B	0.85		1.40	0.033		0.055
b		0.50			0.020	
b1	0.38		0.50	0.015		0.020
D			20.0			0.787
E		8.80			0.346	
e		2.54			0.100	
e3		17.78			0.700	
F			7.10			0.280
I			5.10			0.201
L		3.30			0.130	
Z			1.27			0.050

